


**OFFICE OF THE :-
EXECUTIVE ENGINEER (C)**

**EHV Civil Constn. Cum Maintenance Division,
Mahatransco Administration Building , first Floor,
wing no.102, Chhatrapati Sambhajanagar, Ph. No. (0240) 2331429,
E-mail :ee2710@mahatransco.in CIN: U40109MH2005SGC153646**



No.:EEC/EHV/CCCM/Dn./ CSN /Tech/

00019


Date:-

19 JAN 2024

E-enquiry

To,

.....
.....
.....

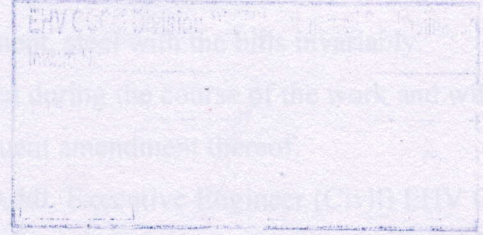

Sub: E-Quotation Enquiry for the Work of Rectification of Collapsible Cable trench in 132KV Yard at 220KV S/S MIDC Jalna, Dist.Jalna on quotation basis.

Dear Sir,

Sealed percentage rate quotations are invited from Govt. registered & experienced Contractors for the above work as per schedule enclosed. The quotation should reach to the office of Executive (Civil) EHV CCCM Division Mahatransco Administration Building, first Floor, wing no.102, Chhatrapati Sambhajanagar on or **before dated.17/01/2024 Time 13.00 Hrs.**

TERMS AND CONDITIONS:

- 1) The work should be carried out as per P.W.D. specification and instructions of the Engineer in-Charge and to the satisfaction of the undersigned.
- 2) The quantities mentioned in the attached schedule are approximate and likely to vary. However payment will be made as per the work actually executed and measured. The rates shown in enclosed schedule B are inclusive of GST.
- 3) The work should be completed within **(2) MONTHS** from the date handing over the site, failing which the contractor shall be liable to pay as compensation an amount equal to one percent or such similar amount as the competent authority may decide of the W.O. cost for every day the work remain unfinished after due date of completion subject to the maximum 10% of the cost of the order.
- 4) The work which is of bad workmanship quality will not be measured and paid.
- 5) Contractor shall have to arrange for require cement, steel etc. at his own cost without involving any financial implications to MSETCL.
- 6) Other material such as require tools and plant will have to arrange by the contractor at his own cost.
- 7) The water arrangement will have to be made by the contractor at his own cost and it is not binding on the part of department to provide water for the work. In case in water is supplied by Department, then

- the water will be charged at the rate 1% of work done for water consuming item or 0.25% of total value of work order as decided by the Engineer in-charge.
- 8) The contractor will have to make good the damages if any made by him during the execution of work at his own cost.
 - 9) The material should be got approved prior to fixing from the Engineer in-charge.
 - 10) Income Tax as per the prevailing income Tax rule and subsequent amendment thereof will be recovered at source of your bill on total value of work done for which the certificate will be issued if desired.
 - 11) Contractor should submit the purchase vouchers for cement, steel with the bills invariably.
 - 12) Contractor will be held responsible for accident occurred during the course of the work and will have to pay the compensation as per the act 1923 and subsequent amendment thereof.
 - 13) Contractor should submit his bill in triplicate through Addl. Executive Engineer (Civil) EHV CCCM Sub Division, MSETCL, Chhatrapati Sambhajanagar. to the undersigned. Payment will be made within 60 days period from the date of receipts of bill to this office.
 - 14) The terms and conditions in the M.S.E.T. Co. Ltd. Booklet 'Tender and contract work' will stand applicable for this work.
 - 15) You will have to deposit **Rs.24,600/-**(5% of quotation value) as security deposit in cash/ DD/FDR of any nationalized Bank within 7 days from the date of receipt of work order, failing which EMD will stand forfeited.
 - 16) The contractor's offer will be considered as inclusive of all taxes and charges and it will be the contractor's responsibility to pay the taxes to Government and same will not be reimbursed to the contractor.
 - 17) Your own offer should be quoted in words and figures scratches and over written rates shall not be considered if not initialed.
 - 18) The contractor has to pay earnest money to **Rs. 5,000.00/-** in cash/RTGS/NEFT/In form of DD/FDR of any Nationalized Bank in favor of Executive Engineer(C) EHV CCCM Division, MSETC Ltd. Chhatrapati Sambhajanagar. If the EMD of required amount is not found in the envelop the quotation will be rejected. The Bank Account Details are as follows Bank of Baroda Account No.04600200000009 IFSC Code : BARB0AURANG, Chhatrapati Sambhajanagar- 431001
 - 19) The undersigned reserves the right to reject any or all quotations without assigning any reason what so ever.
 - 20) GST will be recovered from your bill as per GST norms.
 - 21) Special condition: The payment shall be effected as per fund availability. Due to shortage of fund there are chances of delay in payments for which the agency will have to bear with the Dept. No. any of claim on this account will be entertained.
 - 22) The estimated cost of the work is **Rs.4,89,015/-** only. (Inclusive of all Taxes)

- 23) Contractor has to submit Civil Works Registration Certificate, GST registration certificate, EMD paid receipt, PAN Card, List of technical staff should i.e at least one person completed valid ITI course of surveyor along with the qualification documents, Shop act Licence & Similar work Experience certificate i.e RCC works in live switchyard, as a mandatory documents at the time of submission of Quotation.

Encl: Schedule 'B'


(S.M. Banait)

Executive Engineer (C)
EHV CCCM Division.
MSETCL, Chhatrapati Sambhajnagar.

Copy S.W.R.S. to :

1. The Chief Engineer, EHVP.C. (O&M) Zone MSETCL Chhatrapati Sambhajnagar.
2. The Superintending Engineer (C) EHV CCCM Circle, MSETCL, Chhatrapati Sambhajnagar.
...This is as per approval vide Ltr. No.87 Dtd.04.01.2024.


Copy to:

1. The Addl. Executive Engineer (C) EHV CCCM Sub Division, MSETCL, Jalna.
2. The Dy. Manager (F&A) EHV CCM Division Chhatrapati Sambhajnagar. The amount of this work is Chargeable to sanctioned estimate no. T-/20 Dtd.04.01.2024 FY 2023-24 Dt. under R&M Budget
3. Notice Board

OFFICE OF THE :-

EXECUTIVE ENGINEER (C)

EHV Civil Constn. Cum Maintenance Division,
Mahatransco Administration Building , first Floor,
wing no.102, Chhatrapati Sambhajanagar, Ph. No. (0240) 2331429,
E-mail :ee2710@mahatransco.in CIN: U40109MH2005SGC153646



(e-Enquiry)

QUOTATION NOTICE

The sealed percentage rate quotations are invited for the following works from the Civil Contractors registered with PWD, Railway and such other department and experienced in similar civil works as above. The quotations should be submitted in the office of the Executive Engineer (C), EHV Civil Constn. Cum Maint. Division, Chhatrapati Sambhajanagar on or before **Dtd.17.01.2024 up to 13:00 hrs.**

The blank quotation will be issued on application to contractors, producing the Certificate of valid registration.

| Sr. No. | Name of work | Estimated cost | E.M.D | Time Limit |
|---------|---|------------------|---------------|------------|
| 1. | The Work of Rectification of Collapsible Cable trench in 132KV Yard at 220KV S/S MIDC Jalna, Dist.Jalna on quotation basis. | Rs 4,89,015.00/- | Rs.5,000.00/- | 2 Month |

(S.M. Banait)

Executive Engineer (C)
EHV CCCM Division, MSETCL
Chhatrapati Sambhajanagar

Copy S.W.R.S. to :


1. The Chief Engineer, EHVP.C. (O&M) Zone MSETCL Chhatrapati Sambhajanagar.
 2. The Superintending Engineer (C) EHV CCCM Circle, MSETCL, Chhatrapati Sambhajanagar.
- ...This is as per approval vide Ltr. No.87 Dtd.04.01.2024.

Copy to:

1. The Addl. Executive Engineer (C) EHV CCCM Sub Division, MSETCL, Jalna.
2. The Dy. Manager (F&A) EHV CCM Division Chhatrapati Sambhajanagar. The amount of this work is Chargeable to sanctioned estimate no. T-/20 Dtd.04.01.2024 FY 2023-24 Dt. under R&M Budget
3. Notice Board


**OFFICE OF THE :-
EXECUTIVE ENGINEER (C)**

EHV Civil Constn. Cum Maintenance Division,
Mahatransco Administration Building , first Floor,
wing no.102, Chhatrapati Sambhajnagar, Ph. No. (0240) 2331429,
E-mail :ee2710@mahatransco.in CIN: U40109MH2005SGC153646



Name of Work: The Work of Rectification of Collapsible Cable trench in 132KV Yard at 220KV S/S MIDC Jalna, Dist.Jalna on quotation basis.

Estimated Amount: -Rs. 4,89,015.00/- (Inclusive of All Taxes)


(S.M. Banait)

Executive Engineer (C)
EHV CCCM Division, MSETCL
Chhatrapati Sambhajnagar.

Declaration of Contractor:

I/We hereby quote for the execution of the specified in the above written memorandum within time specified in such memorandum at (at Figure)% above/below/Estimated Rate (in Words) percent above/Below/Estimated rate (to be struck whichever is not applicable) the estimated rates entered in schedule "B" (memorandum showing item of work to be carried out) in accordance in all instruction in writing from the Engineer – in – Charge.

I/We have read the general conditions of contracts & the conditions enumerated in the quotation and the same are binding on us.

Signature of the contractor

Full Address:

MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO. LTD.
EHV CCCM CIRCLE Chh. Sambhajinagar
EHV CCCM DIVISION Chh. Sambhajinagar
EHV CIVIL CONSTRUCTION CUM MAINTENANCE SUB DIVISION, JALNA
Name of Work:- Rectification of Collapsed Cable trench in 132 Kv Yard at 220 KV S/S MIDC Jalna, Dist. Jalna

Abstract

| Sr. No | Activity No | ITEM OF WORK | QTY. | RATE | Add GST18% | Rate Including GST | Unit | Amount |
|--------|-------------|---|-------|----------|------------|--------------------|------|-----------|
| 1 | 50013068 | Excavation for foundation in earth, soil of all types, sand, gravel and soft murum, including removing the excavated material up to a distance of 50 m. beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering including shoring and strutting etc. complete. (Lift upto 1.5 m.) By Mechanical Means | 45.00 | 216.00 | 38.88 | 255.00 | Cum | 11475.00 |
| 2 | 50013069 | Excavation for foundation in hard murum and boulders including removing the excavated material up to a distance 50 metres, beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering including shoring and strutting etc. complete. (Lift upto 1.5m.) By Mechanical Means | 23.00 | 263.00 | 47.34 | 310.00 | Cum | 7130.00 |
| 3 | 50013071 | Excavation for foundation in Soft rock and old cement or lime masonry foundations including removing the excavated material upto a distance of 50 metres beyond the building area and stacking as directed, including dewatering, preparing the bed for the foundation and necessary back filling with available earth /murum, ramming, watering including shoring and strutting etc. complete (lift upto 1.5m) By Mechanical Means | 1.00 | 448.00 | 80.64 | 529.00 | Cum | 529.00 |
| 4 | 50013073 | Excavation for foundation in Hard rock by chiselling, wedging, line drilling, etc. including trimming and levelling the bed, removing the excavated material upto a distance of 50 metres beyond the building area stacking as directed, dewatering and back filling with available earth/ murum watering, ramming etc. complete. (Lift upto 1.5 m). By Mechanical Means | 1.00 | 1366.00 | 245.88 | 1612.00 | Cum | 1612.00 |
| 5 | 50013138 | Providing and laying in situ cement concrete of 1:4:8 proportion with trap/ granite/ quartzite/ gneiss metal in foundation including necessary form work, compacting and curing etc. complete. with fine aggregates of required specifications (Natural sand / VSI sand finely washed etc) | 5.00 | 6391.00 | 1150.38 | 7541.00 | Cum | 37705.00 |
| 6 | 50013153 | Providing and laying in situ /Ready Mix cement concrete M-20 of trap / granite /quartzite/ gneiss metal for R.C.C. work in foundations like raft, strip foundations, grillage and footings of R.C.C. columns and steel stanchions etc. including bailing out water, Steel centering formwork, laying/pumping cover blocks, compaction and curing roughening the surface if special finish is to be provided (Excluding reinforcement and structural steel) etc. complete, With fine aggregate (Natural Sand / Crushed sand VSI Grade finely washed etc) | 7.00 | 7825.00 | 1408.50 | 9234.00 | Cum | 64638.00 |
| 7 | 50013174 | Providing and laying Cast in situ/Ready Mix cement concrete in M-20 of trap/ granite/ quartzite/ gneiss metal for R.C.C. pardi of required thickness including steel centering, formwork, cover blocks, laying/pumping, compacting , curing , finishing and rougheningthem if special finish is to be provided and curing complete.(Excluding reinforcement and structural steel). etc. complete. With fine aggregate (Natural Sand / Crushed sand VSI Grade finely washed etc) | 6.00 | 16670.00 | 3000.60 | 19671.00 | Cum | 118026.00 |
| 8 | 50013181 | Providing and fixing in position TMT - FE - 500 bar reinforcement of various diameters for R.C.C. pile caps, footings, foundations, slabs, beams columns, canopies, staircase, newels, chajjas, lintels pardis, copings, fins, arches etc. as per detailed designs, drawings and schedules. including cutting, bending, hooking the bars, binding with wires or tack welding and supporting as required complete. | 1.00 | 93758.00 | 16876.44 | 110634.00 | MT | 110634.00 |
| 9 | 50013238 | Providing internal cement plaster 20mm thick in two coats in cement mortar 1:4 without neeru finish, to concrete, brick surface, in all positions including scaffolding and curing etc.complete. | 32.00 | 430.00 | 77.40 | 507.00 | Sqm | 16224.00 |

| | | | | | | | | |
|----|----------|--|-------|-----------|----------|-----------|------------|------------------|
| 10 | 50013241 | Providing sand faced plaster externally in cement mortar using approved screened sand, in all positions including base coat of 15 mm thick in cement mortar 1:4 using waterproofing compound at 1 kg per cement bag curing the same for not less than 2 days and keeping the surface of the base coat rough to receive the sand faced treatment 6 to 8 mm thick in cement mortar 1:4 finishing the surface by taking out grains and curing for fourteen days scaffolding etc.complete. | 5.00 | 709.00 | 127.62 | 837.00 | Sqm | 4185.00 |
| 11 | 50013342 | Providing and applying one coat of seal cement primer of approved manufacture and shed including scaffolding preparing the surface by cleaning dirt and other foreign matters, scrapping if necessary including scaffolding etc. complete. | 5.00 | 23.00 | 4.14 | 27.00 | Sqm | 135.00 |
| 12 | 50013340 | Providing and applying two coats of water proof cement paint of approved manufacture and of approved colour to the plastered surfaces including scaffolding if necessary, cleaning and preparing the surface, watering for two days etc. complete. | 5.00 | 83.00 | 14.94 | 98.00 | Sqm | 490.00 |
| 13 | 50013128 | Providing and fabricating structural steel work in rolled sections like joists, channels, angles, tees etc. as per detailed design and drawings or as directed including cutting, fabricating, hoisting, erecting, fixing in position making riveted / bolted /welded connections without connecting plates, braces etc. and including one coat of anticorrosive paint and over it two coats of oil painting of approved quality and shade etc. complete. | 0.60 | 106447.00 | 19160.46 | 125607.00 | MT | 75364.20 |
| 14 | 50013947 | Providing and laying weep holes of 100 mm diameter PVC pipes as per drawing for abutment returns, return walls etc. Complete. | 4.50 | 557.00 | 100.26 | 657.00 | Rmt | 2956.50 |
| 15 | 50003672 | Hiring of 10 MT Crane for lifting,loading,unloading of materials. As directed by engineer incharge. | 10.00 | 1186.00 | 213.48 | 1399.00 | Hr | 13990.00 |
| 16 | 50013081 | Conveying materials obtained from road cutting including all lifts, laying in layers of 20cm. to 30cm. for a lead of 300m. to 500m. inclusive, from the site of excavation to the site of deposition as directed. | 26.90 | 186.00 | 33.48 | 219.00 | Cum | 5891.10 |
| 17 | 50014018 | Sparing services of unskilled mazdoor heavy male at site for various works | 20.00 | 643.00 | 115.74 | 759.00 | Day | 15180.00 |
| 18 | 50014284 | Dismantling brick masonry in lime or cement mortar and stacking the materils as directed with all leads, lifts etc. | 6.90 | 350.00 | 63.00 | 413.00 | Cum | 2849.70 |
| | | | | | | | Say | 489014.50 |

--Sd--

Executive Engineer (C)
EHV CCCM Division, MSETCL
Chhatrapati Sambhajnagar