



# MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO.LTD.

(CIN No. U40109MH2005SGC153646)

From:- Executive Engineer (Civil)  
EHV Civil Construction cum Maintenance Division Nashik  
"Administrative Building", Block No. 6, 1<sup>st</sup> floor, Racca Plot, Old Saykheda Road,  
Jail Road, Nashik Road-422 101.  
Ph No.:-0253-2403101 (O), Fax No.:-0253-2403103  
E-Mail ID :ee5710@mahatransco.in Website: www.mahatransco.in

Ref. No. EEC/EHV/CCCM Dn/NSK/Tech-

Date:-

NO 1 6 5 2

24 OCT 2018

## e- Quotation

Sealed and superscripted e- quotations are invited for the work of "Rewiring/ internal electrification of rest house at 220 KV Sub station Babhaleshwar, Tal:- Rahata, Dist:- Ahemdagar." As detailed in schedule "B" is enclosed herewith subject to following terms and conditions.

**Name of Work:- Rewiring/ internal electrification of rest house at 220 KV Sub station Babhaleshwar, Tal:- Rahata, Dist:- Ahemdagar.**

The quotations should reach to this office on or before **01/11/2018** up to 15.00 Hrs

1) The rates [percentage] should be quoted on Firm Quotation basis (Two Bid System only) including cost of materials, labours & T&P etc. required for execution of the work.

### (a) **Compulsory Primary Documents in 1<sup>st</sup> Envelop:(Technical Bid)**

- (i) Valid Certificate of Electrical Contractor License.
- (ii) GST/ GSTIN Registration Certificate.
- (iii) Experience of having successfully completed similar types of works.
- (iv) PAN card.
- (v) Shop Act certificate.
- (vi) Payment of **EMD Rs. 3000.00** to be made by bidder off-line only upto 14.00 hrs of **01/11/2018** in the office of EE(C), Dn., Nashik. EMD details Amount and M.R. No. should be super-scribed on the Envelope

### (b) **Documents in 2<sup>nd</sup> Envelop:(Price Bid)**


i) Price bid only where in the rates/percentage should be quoted in figures as well as in words.

### **NOTE:- Envelop No.2 (Price Bid) will be opened after qualifying in (Technical Bid) Envelop No.1**

- 2) The quantities enumerated in here attached Schedule B are approximate, however the payment will be made against actual executed quantities on site.
- 3) The work should be completed within **30 days** from the date of handing over the site to commence the work, failing of which a penalty at ½% per week subject to the maximum 10% of the ordered value will be imposed.
- 4) The work should be strictly carried out as per standard specifications & up to the entire satisfaction of the Engineer-in-charge.
- 5) No materials will be supplied by the MSETCL for this work except materials as shown in Schedule A
- 6) Payment will be made through First & Final bill/ R.A. bill basis at the discretion of undersigned.
- 7) The contractor will have to pay security deposit to this office equal to 5% of the ordered value.
- 8) In case any accident occurred to the Contractor's labour/workmen during execution of work, the contractor will be fully responsible for all claims & compensation. No charge in any case will be borne by the MSETCL
- 9) The materials to be utilized for the work should be getting approved from the Engineer-in-charge prior to its utilization for the work.

- 10) The terms & conditions enumerated in the approved Booklet "TENDER AND CONTRACTOR FOR WORKS" will be applied in this case & will be binding on the contractor entirely.
- 11) Right to accept any or to reject any or all the quotations without assigning any reason there of is reserved by the undersigned.
- 12) Payment will be released to agency as per availability of funds. Further MSETCL will not pay any compensation due to non availability of funds.

Yours faithfully,

  
**Executive Engineer [Civil]**  
**EHV Civil CCM Dn Nashik.**

Copy s.w.r.t.-

- 1) The Chief Engineer EHV Projects cum O&M Zone, Nashik.
- 2) The Superintending Engineer EHV CCCM Circle, Nashik.

Copy to-

- 1) Additional Executive Engineer [Civil] EHV Civil S/Dn.-Babhaleshwar.
- 2) The Dy. Manager [F&A] Dn. Office, Nashik.
- 3) Master File/Notice Board.



**MAHARASHTRA STATE ELECTRICITY TRANSMISSION COMPANY LIMITED**

**EHV Civil Construction Cum Maint. Division. Nashik.**

**Name of Work - Rewiring/ internal electrification of rest house at 220 KV Sub station Babhaleshwar,  
Tal:- Rahata, Dist:- Ahemdagar**

**Schedule "B"**

Sr No	Description of item	Unit	Qty	Rate with GST 18%	Amount
1	Dismantling the existing light, fan, bell, clock, independent plug point, wiring including circuit mains of all types along with accessories etc.complete as per specification No: WG-DM/PW (1-15-1) Page-43	Nos	100	8.00	800.00
2	Dismantling the existing Aluminium/copper mains, sub-mains wiring upto 10 sq.mm. along with accessories etc.Complete as per specification No: WG-DM/PW (1-15-3) Page-43	Mtr	200	3.00	600.00
3	Dismantling of existing fluorescent fittings of any type & size.(2-14-1) Page-63	Nos	40	16.00	640.00
4	Dismantling the existing ceiling fan /exhaust fan / cabin fan / bracket fan complete with accessories, G.I. down rod, frame etc. and making the site clear.(2-14-4) Page-63	Nos	10	38.00	380.00
5	Dismantling the existing switchgears, DB, and Bus bar of any size complete with/ without board or angle iron frame(5-12-1)Page-111	Nos	2	95.00	190.00
6	Point wiring for light / fan / bell /exhaust fan Hybrid type (Surface type under false ceiling and concealed type for drops & switch boards on walls) in min 20 mm PVC conduit / casing n capping with 1.5 sq.mm. (2+1E) FR grade copper wires, modular type switch, earthing and required accessories as per specification No: WG-PW/CW ( 1-9-15 )Page-32	Nos	80	710.00	56800.00
7	Point wiring for independent plug, concealed type in min 20 mm PVC conduit with 1.5 sq.mm (2+1E) FR grade copper wires, modular type switch and socket, earthing and required accessories as per specification No WG-PW/SW (1-9-11)Page-32	Nos	17	867.00	14739.00
8	Wiring for plug on board with Switch socket concealed type and copper wiring, earthing and with modular accessories as per specification No: WG-PW/CW (1-9-14) Page-32	Nos	25	580.00	14500.00
9	Supplying & laying Rigid PVC conduit 20 mm Dia. with necessary accessories in RCC work/false ceiling/false flooring as per specification No. WG-MA/CC, para no. 1.2.1 (1-1-8)Page-12	Mtr	250	100.00	25000.00
10	Supplying & erecting I.S.I. mark Rigid P.V.C. conduit 25 mm. dia. with necessary accessories in wall/floor with chiselling appropriately as per specification No: WG-MA/CC, para no. 1.2.1 (1-1-9) Page-12	Mtr	200	139.00	27800.00

Sr No	Description of item	Unit	Qty	Rate with GST 18%	Amount
11	Supplying & erecting mains with 2x1.5 sq.mm F.R.L.S copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places as per specification No: WG-MA/BW (1-3-4) Page-16	Mtr	250	46.00	11500.00
12	Supplying & erecting mains with 2x2.5 sq.mm F.R.L.S copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places. as per specification No: WG-MA/BW (1-3-6) Page-16	Mtr	300	69.00	20700.00
13	Supplying & erecting mains with 2x4 sq.mm F.R.L.S copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places. as per specification No: WG-MA/BW (1-3-8) Page-16	Mtr	300	93.00	27900.00
14	Supplying and erecting fan clamp of 30 x 5 mm. M.S. flat of required length and 10 mm. M.S. bolt and nuts erected with necessary hook of 10 mm. M.S. round bar and painted.(2-12-3)Page-59	Nos	10	204.00	2040.00
15	Supplying, erecting & marking SPMCB 6A to 32A, C-series (for motor/power) in provided distribution board as per specification No. SW-SWR/MCB (5-3-2) Page-93	Nos	20	201.00	4020.00
16	Supplying, erecting & marking DPMCB 40A to 63A, C- series (for motor/power) in provided distribution board as per specification No. SW-SWR/MCB (5-3-8) Page-94	Nos	2	832.00	1664.00
17	Supplying and erecting single pole and neutral distribution board (SPNDB) surface/flush mounted with 2 ways for incoming and 6 ways for outgoing SP MCB's on iron/ G.I. frame/wooden board as per specification No. SW-SWR/MCBDB (5-4-15) Page-97	Nos	2	1026.00	2052.00
18	Providing earthing with Galvanized cast iron earth plate size 60 x 60 x 0.6 cm complete with all materials, testing & recording the results as per specification No. EA-EP (9-1-1) Page-166	Nos	1	4988.00	4988.00
19	Supplying and erecting 16 / 20 / 25 A starter (modular range) 2 module for AC unit on provided box complete & duly concealed with necessary material and connected.(1-8-45 ) Page-30	Nos	6	389.00	2334.00
20	Supplying and erecting modular type switch 16 / 20 A with indicator, ISI mark, approved make duly erected on provided plate and box with wiring connections complete.(1-8-6) Page-26	Nos	14	163.00	2282.00
21	Supplying and erecting modular type 3 pin 6 / 16A multi socket with safety shutter ISI mark approved make duly erected on provided plate and box with wiring connections complete.(1-8-11) Page-27	Nos	14	188.00	2632.00
22	Supplying and erecting modular type indicator lamp ISI mark approved make duly erected on provided plate and box with wiring connections complete(1-8-12 ) Page-27	Nos	14	74.00	1036.00
23	Supplying and erecting electronic type step regulator for ceiling fan 600/ 900/ 1200/ 1400 mm. sweep, complete erected on provided switch board.(2-12-10) Page-60	Nos	20	235.00	4700.00

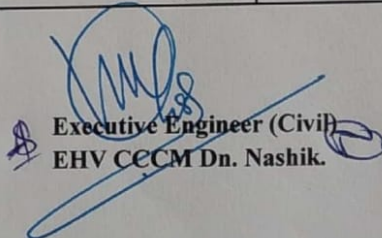


Sr No	Description of item	Unit	Qty	Rate with GST 18%	Amount
24	Supplying and erecting gong with double coil suitable for 230V. complete erected on polished wooden block.(2-2-12) Page-46	Nos	3	80.00	240.00
25	Supplying & erecting T8 LED 20W tube light fitting (4 feet) with aluminium housing, heat sink, integrated HF electronic driver complete( including lamp).	Nos	4	1034.00	4136.00
26	Supplying and erecting Modern finished blades with unique double bend angle, double ball bearings with energy efficient Decorative Ceiling Fan 1200/1400 mm sweep complete erected in position as perspecification no. FGFN/ CF (Decorative)	Nos	2	3472.00	6944.00
27	Supplying and erecting LED square / circular 5 to 8W downlighter having pressure die-cast aluminium housing, opal translucent cover, mounting arrangement with board for surface type or spring loaded mounting clips for flush type complete.	Nos	3	868.00	2604.00
28	Supplying and erecting LED square / circular 9 to 12W downlighter having pressure die-cast aluminium housing, opal translucent cover, mounting arrangement with board for surface type or spring loaded mounting clips for flush type complete	Nos	3	1197.00	3591.00
29	Supplying and erecting LED square / circular 13 to 15W downlighter having pressure diecast aluminum housing, opal translucent cover, mounting arrangement with board for surface type or spring loaded mounting clips for flush type complete	Nos	3	1395.00	4185.00
30	Supplying and erecting LED square / circular 16 to 20W downlighter having pressure diecast aluminium housing, opal translucent cover, mounting arrangement with board for surface type or spring loaded mounting clips for flush type complete	Nos	3	1505.00	4515.00
31	Supplying and erecting LED flexible strip light 5m length upto 25W conforming IP 65 of any colour with driver complete	Nos	4	2640.00	10560.00
32	Supplying LED concealed type foot / step light with aluminium body for indoor application suitable for upto 5 W LED including driver and erecting by making necessary arrangement/recess in wall to make it flush with surface	Nos	4	604.00	2416.00
33	Making suitable size recess in any type of false ceiling for erection of flush type down lighter and finishing the background to match the original surface upto 20W	Nos	6	75.00	450.00
34	Supplying & erecting T8 LED 18W tube light fitting (4 feet) with polycarbonate housing, heat sink, integrated HF electronic driver complete (including lamp).	Nos	3	672.00	2016.00
35	Supplying & erecting mains with 2x6 sq.mm F.R copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places as per specification No: WG-MA/BW	Rmt	5	126.00	630.00



Sr No	Description of item	Unit	Qty	Rate with GST 18%	Amount
36	Supplying & erecting mains with 2x10 sq.mm F.R.L.S copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places as per specification No: WG-MA/BW	Rmt	5	223.00	1115.00
37	Supplying & erecting mains with 4x16 sq.mm F.R L.S copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places as per specification No: WG-MA/BW	Rmt	4	697.00	2788.00
38	Supplying & erecting mains with 4x25 sq.mm F.R.L.S copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places as per specification No: WG-MA/BW	Rmt	4	1181.00	4724.00
39	Supplying and erecting unbreakable concealed type modular switch box with double mounting plate for 1 module duly erected flush to wall with required chiseling and finishing with cement mortar / POP as per required to match the background in an approved manner	Nos	5	251.00	1255.00
40	Supplying and erecting unbreakable concealed type modular switch box with double mounting plate for 2 module duly erected flush to wall with required chiselling and finishing with cement mortar / POP as per required to match the background in an approved manner	Nos	5	251.00	1255.00
41	Supplying and erecting unbreakable concealed type modular switch box with double mounting plate for 3 module duly erected flush to wall with required chiselling and finishing with cement mortar / POP as per required to match the background in an approved manner	Nos	5	287.00	1435.00
42	Supplying and erecting unbreakable concealed type modular switch box with double mounting plate for 4 module duly erected flush to wall with required chiselling and finishing with cement mortar / POP as per required to match the background in an approved manner	Nos	5	321.00	1605.00
43	Supplying and erecting unbreakable concealed type modular switch box with double mounting plate for 6 module duly erected flush to wall with required chiselling and finishing with cement mortar / POP as per required to match the background in an approved manner	Nos	5	431.00	2155.00
44	Supplying and erecting unbreakable concealed type modular switch box with double mounting plate for 8 module duly erected flush to wall with required chiselling and finishing with cement mortar / POP as per required to match the background in an approved manner	Nos	5	507.00	2535.00
45	Supplying and erecting unbreakable concealed type modular switch box with double mounting plate for 12 module duly erected flush to wall with required chiselling and finishing with cement mortar / POP as per required to match the background in an approved manner	Nos	4	562.00	2248.00

Sr No	Description of item	Unit	Qty	Rate with GST 18%	Amount
46	Supplying and erecting unbreakable concealed type modular switch box with double mounting plate for 16 / 18 module duly erected flush to wall with required chiselling and finishing with cement mortar / POP as per required to match the background in an approved manner	Nos	4	614.00	2456.00
47	Supplying and erecting White Footlight with 4 modules concealed modular box and lamp holder with cover complete erected on wall /flush to wall with necessary chiselling in wall and finishing with cement and mortar / PoP as per required and duly connected in an approved manner.	Nos	4	486.00	1944.00
48	Supplying and erecting modular type T.V. socket single outlet ISI mark approved make duly erected on provided plate and box with wiring connections complete.	Nos	4	101.00	404.00
49	Supplying and erecting modular type telephone socket two gang with safety shutter ISI mark approved make duly erected on provided plate and box with wiring connections complete	Nos	4	123.00	492.00
50	Supplying and erecting modular type computer Jack RJ 45 with safety shutter ISI mark approved make duly erected on provided plate and box with wiring connections complete	Nos	4	126.00	504.00
51	Supplying and erecting modular type bell indicator ISI mark approved make duly erected on provided plate and box with wiring connections complete	Nos	4	177.00	708.00
				<b>Total Rs</b>	<b>299207.00</b>

  
**Executive Engineer (Civil)**  
**EHV CCCM Dn. Nashik.**

I / We hereby agree to carryout the above work as under :-

- At estimated cost.
- Above.....% in words.....Of Estimated cost in Schedule "B"
- Below.....% in words.....Of Estimated cost in Schedule "B"

I/ We have read the instructions and the same are binding on me / us.

Signature of the Contractors & Address.