



MAHATRANSCO

MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO.LTD.

(CIN No. U40109MH2005SGC153646)

From:- Executive Engineer (Civil)

EHV Civil Construction cum Maintenance Division Nashik

"Administrative Building", Block No.6, 1st floor, Racca Plot,

Old Saikheda Road, Jail Road, Nashik Road-422 101.

Ph No:-0253-2403101 (O), Extension Phone No, 0253-2403110

E-Mail ID : ee5710@mahatransco.in Website: www.mahatransco.in

Ref. No. EEC/EHV/CCCM Dn/NSK/Tech-

Date: 26 FEB 2021

No - 248

e- Quotation

Sealed and superscripted e- quotations are invited for the work of "Providing & laying vitrified tiles for control room in panel room at 132 KV, Takali Sub station, Dist:- Nashik." As detailed in schedule "B" is enclosed herewith subject to following terms and conditions.

Name of Work:- Providing & laying vitrified tiles for control room in panel room at 132 KV Takali Sub station, Dist:- Nashik.

The quotations should reach to this office on or before **05/03/2021** up to 15.00 Hrs.

- 1) The rates [percentage] should be quoted on Firm Quotation basis (Two Bid System only) including cost of materials, labours & T&P etc. required for execution of the work.

(a) Compulsory Primary Documents in 1st Envelop:(Technical Bid)

- (i) Valid Certificate of Registration of appropriate class for Civil works from PWD /MES/ Railways/ Jeevan Pradhikaran ETC.OR From Any Govt. / Central Government.
- (ii) GST/ GSTIN Registration Certificate.
- (iii) PAN Card
- (iv) E.P.F. Registration Certificate – issued by competent authority of Govt.
- (v) Experience of having successfully completed similar civil works.
- (vi) Payment of **EMD Rs. 3000.00** to be made by bidder off-line only upto 14.00 hrs of **05/03/2021** in the office of EE(C), Dn., Nashik. EMD details Amount and M.R. No. should be super-scribed on the Envelope.

(b) Documents in 2nd Envelop:(Price Bid)

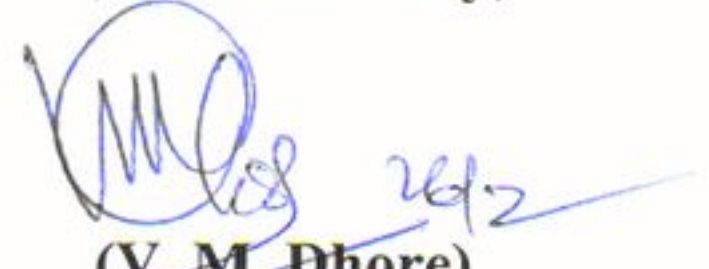
- i) Price bid only where in the rates/percentage should be quoted in figures as well as in words.

NOTE:- Envelop No.2 (Price Bid) will be opened after qualifying in (Technical Bid) Envelop No.1

- 2) The quantities enumerated in here attached Schedule B are approximate, however the payment will be made against actual executed quantities on site.
- 3) The work should be completed within **15 days** from the date of handing over the site to commence the work, failing of which a penalty at 1/2% per week subject to the maximum 10% of the ordered value will be imposed.
- 4) The work should be strictly carried out as per standard specifications & up to the entire satisfaction of the Engineer-in-charge.

- 5) Cement of approved make OF MANIKGARH/ACC/Orient/Rajshree as per IS 8912-1989 i.e.43-grade OPC or equivalent approved make will be procured & used.
- 6) No materials will be supplied by the MSETCL for this work except materials as shown in Schedule B
- 7) Payment will be made through First & Final bill/ R.A. bill basis at the discretion of undersigned.
- 8) The contractor will have to pay security deposit to this office equal to 5% of the ordered value.
- 9) In case any accident occurred to the Contractor's labour/workmen during execution of work, the contractor will be fully responsible for all claims & compensation. No charge in any case will be borne by the MSETCL
- 10) The materials to be utilized for the work should be getting approved from the Engineer-in-charge prior to its utilization for the work.
- 11) The terms & conditions enumerated in the approved Booklet "TENDER AND CONTRACTOR FOR WORKS" will be applied in this case & will be binding on the contractor entirely.
- 12) Right to accept any or to reject any or all the quotations without assigning any reason there of is reserved by the undersigned.
- 13) Payment will be released to agency as per availability of funds. Further MSETCL will not pay any compensation due to non availability of funds.

Yours faithfully,


(V. M. Dhore)
Executive Engineer (Civil)
EHV Civil CCM Dn.Nashik.

Copy s.w.r.t.-

- 1) The Superintending Engineer (Civil) EHV CCCM Circle, Nashik.

Copy to-

- 1) Additional Executive Engineer (Civil) EHV CCCM Sub Division Nashik-I.
- 2) Dy. Manager (F&A) EHV CCCM Division Nashik.
- 3) Master File/Notice Board.

MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO.LTD.
EHV CCCM DIVISION, NASHIK

Name of work- Providing & laying vitrified tiles for control room in panel room at 132 KV Takali Sub station, Dist:- Nashik

SCHEDULE 'B'

It. No.	Description of item	Unit	Quantity	Rate, Rs.	Add GST	Total Rate	Amount
1	Removing cement tiles, or marble or polished shahabad floor or dado without bed concrete including stacking the materials as directed with all leads, lifts etc. complete	Sq.M.	169.00	43.00	7.74	50.74	8575.06
2	Providing and laying vitrified mirror / glossy finish tiles decorative type having size 590 mm to 605 mm x 590 mm to 605 mm of 8 to 10 mm thickness and confirming to IS. 15622-2006 (group Bla) of approved make, shade and pattern for flooring in required position laid on a bed of 1:4 cement mortar including neat cement float, filling joints, curing and clearing etc. complete. a) Flooring	Sq.M.	169.00	1174.00	211.32	1385.32	234119.08
3	Providing and laying vitrified mirror / glossy finish tiles having size 590 mm to 605 mm x 590 mm to 605 mm of 8 to 10 mm thickness and confirming to IS. 15622-2006 (group Bla) of approved make, shade and pattern for flooring in required position laid on a bed of 1:4 cement mortar including neat cement float, filling joints, curing and clearing etc. complete. b) Skirting	Sq.M.	9.00	1247.00	224.46	1471.46	13243.14
4	Providing and laying telephone black / Amba White / Cadbury brown / Ruby red / Ocean Brown granite stone of 18 to 20 mm thick for door frame/ dado/ window boxing etc. On C.M. 1:6 including filling joints with polymer base filler nosing the sharp edges wherever necessary, curing, etc. complete.	Sq.M.	5.00	4393.00	790.74	5183.74	25918.70
5	Providing & fixing in position single shutter/panel french door with frame & pannel in standard design & drawing included SS finished tower bolt, handle, aldop, 3.5mm clear glass with square brite bar of 10 square mm with 100mm bar spacing & G.I. Sheet 1mm (Jindal 120 gsm skin pass or equivalent) for shutter & 1.2mm (Jindal 120 gsm skin pass or equivalent) for frame with pure polyster powder coating as directed by Engineer Incharge.	Sq.M.	1.00	5619.00	1011.42	6630.42	6630.42
6	Providing & fixing in position Double shutter/panel french door with frame & pannel in standard design & drawing included SS finished tower bolt, handle, aldop, 3.5mm clear glass with square brite bar of 10 square mm with 100mm bar spacing & G.I. Sheet 1mm (Jindal 120 gsm skin pass or equivalent) for shutter & 1.2mm (Jindal 120 gsm skin pass or equivalent) for frame with pure polyster powder coating as directed by Engineer Incharge.	Sq.M.	1.00	5345.00	962.10	6307.10	6307.10
7	Providing and fixing white glazed earthenware lipped flat back/corner type Urinal with PVC 5 liters flushing cistern with fittings, inlet pipe with stop tap, brackets for fixing the cistern, 32 mm diameter P.V.C. flush pipe with fitting including lead soil pipe, lead trap and soil pipe connection up to the outside face of wall.	No.	1.00	4217.00	759.06	4976.06	4976.06
Total Rs							299769.56
Say Rs.							299770.00

Executive Engineer (Civil)
EHV CCCM Division Nashik.

I / We hereby agree to carryout the above work as under :-

- At estimated cost.
 - Above.....% in words.....Of Estimated cost in Schedule "B"
 - Below.....% in words.....Of Estimated cost in Schedule "B"
- I/ We have read the instructions and the same are binding on me / us.

Signature of the Contractors & Address.