



MAHATRANSCO

MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO.LTD.

(CIN No. U40109MH2005SGC153646)

From:- Executive Engineer (Civil)

EHV Civil Construction cum Maintenances Division Nashik

"Administrative Building", Block No. 6, 1st floor, Racca Plot,

Old Saikheda Road, Jail Road, Nashik Road-422 101.

Ph No.:-0253-2403101 (O), Extension Phone No, 0253-2403110

E-Mail ID :ee5710@mahatransco.in Website: www.mahatransco.in

Ref. No. EEC/EHV/CCCM Dn/NSK/Tech- **No - 113** - Date:- **02 FEB 2022**

e- Quotation

Sealed and superscripted e- quotations are invited for the work of "**Electrification work of staff quarter at 132 KV Supa Sub station, Dist:- Ahmednagar.**" As detailed in schedule "B" is enclosed herewith subject to following terms and conditions.

Name of Work:- Electrification work of staff quarter at 132 KV Supa Sub station,
Dist:- Ahmednagar.

The quotations should reach to this office on or before **08/02/2022** up to 15.00 Hrs


- 1) The rates [percentage] should be quoted on Firm Quotation basis (Two Bid System only) including cost of materials, labours & T&P etc. required for execution of the work.
- (a) **Compulsory Primary Documents in 1st Envelop:(Technical Bid)**
 - (i) Valid Certificate of Electrical Contractor License and registration.
 - (ii) GST/ GSTIN Registration Certificate.
 - (iii) Experience of having successfully completed similar types of works.
 - (iv) PAN card.
 - (v) Shop Act certificate/ Udyog Adhar Registration.
 - (vi) Payment of **EMD Rs. 4610.00** to be made by bidder off-line only upto 14.00 hrs of **08/02/2022** in the office of EE(C), Dn., Nashik. EMD details Amount and M.R. No. should be super-scribed on the Envelope and having registered vendor of MSETCL.
- (b) **Documents in 2nd Envelop:(Price Bid)**
 - i) Price bid only where in the rates/percentage should be quoted in figures as well as in words.

NOTE:- Envelop No.2 (Price Bid) will be opened after qualifying in (Technical Bid) Envelop No.1

- 2) The quantities enumerated in here attached Schedule B are approximate, however the payment will be made against actual executed quantities on site.
- 3) The work should be completed within **15 days** from the date of handing over the site to commence the work, failing of which a penalty at ½% per week subject to the maximum 10% of the ordered value will be imposed.
- 4) The work should be strictly carried out as per standard specifications & up to the entire satisfaction of the Engineer-in-charge.

- 5) No materials will be supplied by the MSETCL for this work except materials as shown in Schedule A
- 6) Payment will be made through First & Final bill/ R.A. bill basis at the discretion of undersigned.
- 7) The contractor will have to pay security deposit to this office equal to 5% of the ordered value.
- 8) In case any accident occurred to the Contractor's labour/workmen during execution of work, the contractor will be fully responsible for all claims & compensation. No charge in any case will be borne by the MSETCL
- 9) The materials to be utilized for the work should be getting approved from the Engineer-in-charge prior to its utilization for the work.
- 10) The terms & conditions enumerated in the approved Booklet "TENDER AND CONTRACTOR FOR WORKS" will be applied in this case & will be binding on the contractor entirely.
- 11) Right to accept any or to reject any or all the quotations without assigning any reason there of is reserved by the undersigned.
- 12) Payment will be released to agency as per availability of funds. Further MSETCL will not pay any compensation due to non availability of funds.

Yours faithfully,

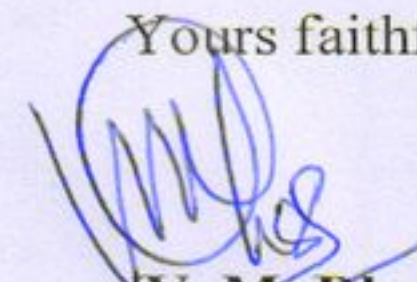

(V. M. Dhore)
Executive Engineer [Civil]
EHV Civil CCM Dn Nashik.

Copy s.w.r.to.-

- 1) The Superintending Engineer (Civil) EHV CCCM Circle, Nashik.

Copy to-

- 1) The Dy. Manager [F&A] Dn. Office, Nashik.
- 2) Master File/Notice Board.

MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO.LTD
EHV CCCM Division, Nashik


Name of work :-Electrification work of staff quarter at 132 KV Supa Sub station, Dist:- Ahmednagar.

SCHEDULE 'B'

Sr No	Description	Qty	Unit	Unit Price in Rs	Add GST	Price including GST	Amount in Rs
1	Point wiring for light/fan/bell hybrid type (Surface type under false ceiling and concealed type for drops & switch boards on walls) in min 20 mm PVC conduit / casing n capping with 1.5 sq.mm. (2+1E) FR grade copper wires, modular type switch, earthing and required accessories as per specification No: WGPW/HW (1-9-15)	150.00	Point	493.00	88.74	581.74	87261.00
2	Point wiring for independent plug in PVC trunking (casingcapping) with 1.5 sq.mm (2+1E)FRLSH grade copper wire, modular type switch, earthing and required accessories as per specification No: WG-PW/SW(1-9-28)	55.00	Point	640.00	115.20	755.20	41536.00
3	Supplying and erecting ISI mark modular type switch 6A / 10Aduly erected on provided plate andbox with wiring connections complete.(1-8-1)	150.00	Each	71.00	12.78	83.78	12567.00
4	Supplying and erecting ISI mark modular type Two way switch 6A / 10A (2 Module), duly erected on provided plate and boxwith wiring connections complete.(1-8-5)	16.00	Each	103.00	18.54	121.54	1944.64
5	Supplying and erecting ISI mark modular type bell indicator, duly erected on provided plate and box with wiring connections(1-8-18)	4.00	Each	154.00	27.72	181.72	726.88
6	Supplying and erecting ISI mark modular type D.P. switch 32A with indicator, duly erected on provided plate and box with wiring connections complete.(1-8-8)	4.00	Each	185.00	33.30	218.30	873.20
7	Supplying and erecting ISI mark modular type (two module) electronic step regulator for fan, duly erected on provided plate and box with wiring connections complete.(1-8-23)	10.00	Each	372.00	66.96	438.96	4389.60
8	Supplying and erecting PVC Surface modular switch box with double mounting plate for 1 module complete duly erected.(1-8-26)	4.00	Each	125.00	22.50	147.50	590.00
9	Supplying and erecting PVC Surface modular switch box with double mounting plate for 3 modules duly erected.(1-8-28)	6.00	Each	153.00	27.54	180.54	1083.24
10	Supplying and erecting PVC Surface modular switch box with double mounting plate for 4 modules duly erected.(1-8-29)	4.00	Each	171.00	30.78	201.78	807.12
11	Supplying and erecting PVC Surface modular switch box with Double mounting & front plate for 8 modules complete duly connected.(1-8-31)	4.00	Each	259.00	46.62	305.62	1222.48
12	Supplying and erecting PVC Surface modular switch box with double mounting plate for 16 / 18 module duly erected.(1-8-33)	2.00	Each	370.00	66.60	436.60	873.20

Sr No	Description	Qty	Unit	Unit Price in Rs	Add GST	Price including GST	Amount in Rs
13	Supplying and erecting PVC Surface modular switch box with double mounting plate for 12 modules duly erected.(1-8-32)	18.00	Each	333.00	59.94	392.94	7072.92
14	Supplying & erecting LED 20W tube light fitting (4 feet) with aluminium housing, heat sink, integrated HF electronic driver complete.(2-1-23)	40.00	Each	935.00	168.30	1103.30	44132.00
15	Supplying and erecting LED Street light fitting suitable for above 40W to 48W lamp, including lamp, with PF > 0.95 class IP 65 and above housing of pressure die cast aluminium alloy and heat sink extruded aluminium complete per specification No . FG-ODF/FLS2..(2-5-4)	8.00	Each	3682.00	662.76	4344.76	34758.08
16	Supplying and erecting regular/ standard model ceiling fan of 900 /1050 mm. sweep complete erected in position as per specification no. FG-FN/CF (2-12-2)	10.00	Each	1913.00	344.34	2257.34	22573.40
17	Supplying and erecting fresh air cum exhaust fan of light duty 250 V A.C. 50 cycles 225mm. 1400 RPM rust proof body & blades, wire mesh, duly erected in an approved manner.(2-12-14)	4.00	Each	1253.00	225.54	1478.54	5914.16
18	Supplying and erecting flush type shockproof plug socket 6A & 16A (6 pin) with 16A switch combined with indicator lamp and fuse with gang box on wooden board.(1-7-13)	4.00	Each	180.00	32.40	212.40	849.60
19	Supplying & erecting mains with 2x2.5 sq.mm FRLSH copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places. as per specification No: WGMA/BW (1-3-4)	420.00	Mtr	62.00	11.16	73.16	30727.20
20	Supplying & erecting mains with 2x1.5 sq.mm FRLSH copper PVC insulated wire laid in provided conduit/trunking/inside pole/Bus bars or any other places as per specification No: WGMA/BW(1-3-2)	750.00	Mtr	40.00	7.20	47.20	35400.00
21	Supplying & erecting 5W-7W, 230V integral type LED Lamp suitable for B-22/E-27 base.(2-10-10)	20.00	Each	141.00	25.38	166.38	3327.60
22	Supplying, erecting & marking SPMCB 6A to 32A, B- series (for lighting) in provided distribution board as per specification no. SWSWR/ MCB (5-3-3)	18.00	Each	166.00	29.88	195.88	3525.84
23	Supplying and erecting street light Wall bracket made from 40mm. dia 'B' class G.I. pipe 1.2 m in total length complete as per specification no. FG-BKT/WB (2-9-4)	8.00	Each	719.00	129.42	848.42	6787.36
24	Supplying and erecting plywood 12 mm thick fixed to wall or on provided panel board with necessary materials such as screws, wall fasteners supports, nuts bolts etc. complete.(6-1-12)	8.80	m ²	715.00	128.70	843.70	7424.56
25	Supplying and erecting single pole and neutral distribution board (SPNDB) with door surface/flush mounted with 2 ways for incoming and 10 ways for outgoing SP MCB's on iron/ GI frame as per specification no. SW-SWR/MCBDB (5-4-19)	6.00	Each	1360.00	244.80	1604.80	9628.80
26	Supplying, erecting & marking DPMCB 6 A to 32 A B- series (for lighting) in provided distribution board as per specification no. SWSWR/ MCB (5-3-7)	6.00	Each	465.00	83.70	548.70	3292.20

Sr No	Description	Qty	Unit	Unit Price in Rs	Add GST	Price including GST	Amount in Rs
27	Providing earthing with galvanized iron earth plate size 60 x 60 x 0.6 cm complete with all materials, testing & recording the results as per specification no. EA-EP (9-1-1)	4.00	Each	4280.00	770.40	5050.40	20201.60
28	Supplying & erecting HMS P.V.C. conduit 32 mm. dia. with necessary accessories in wall/floor with chiselling appropriately as per specification No: WG-MA/CC (1-1-11)	300.00	Mtr	153.00	27.54	180.54	54162.00
29	Supplying and erecting mains with ISI mark. WP 2 x 4 sq. mm. 1100 V grade aluminium PVC insulated and PVC sheathed wires on G.I. bearer wire No. 8 SWG complete erected with required size of porcelain reel insulators and 16 SWG G.I. binding wire.(1-4-2)	180.00	Mtr	64.00	11.52	75.52	13593.60
30	Supplying and erecting PVC Surface modular switch box with double mounting plate for 6 modules duly erected. (1-8-30)	4.00	Each	226.00	40.68	266.68	1066.72
31	Supplying and erecting ISI mark modular type switch 16A duly erected on provided plate and box with wiring connections complete.(1-8-2)	8.00	Each	95.00	17.10	112.10	896.80
32	Supplying and erecting ISI mark modular type switch 16 / 20A with indicator, duly erected on provided plate and box with wiring connections complete (1-8-6)	8.00	Each	135.00	24.30	159.30	1274.40
Total Rs.							460483.20
Say Rs.							460483.00


Executive Engineer (Civil)
EHV CECM Dn Nashik.

I / We hereby agree to carryout the above work as under :-

- At estimated cost.
- Above.....% in words.....Of Estimated cost in Schedule "B"
- Below.....% in words.....Of Estimated cost in Schedule "B"

I/ We have read the instructions and the same are binding on me / us.

Signature of the Contractors & Address.