

**MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO.LTD.**

(CIN No. U40109MH2005SGC153646)

From:- Executive Engineer (Civil)  
EHV Civil Construction cum Maintenances Division Nashik  
"Administrative Building", Block No. 6, 1<sup>st</sup> floor, Racca Plot,  
Old Saikheda Road, Jail Road, Nashik Road-422 101.  
Ph No.:-0253-2403101 (O), Extension Phone No, 0253-2403110  
E-Mail ID :ee5710@mahatransco.in Website: www.mahatransco.in

Ref. No. EEC/EHV/CCCM Dn/NSK/Tech- **No - 1 2 9 -** Date:- **0 4 FEB 2022**

**e- Quotation**

Sealed and superscripted e- quotations are invited for the work of "Providing and fixing of office table, side table, office chairs & cupboards for 220 KV Sub station Manmad, Tal:- Nandgaon, Dist:- Nashik." As detailed in schedule "B" is enclosed herewith subject to following terms and conditions.

**Name of Work:-** Providing and fixing of office table, side table, office chairs & cupboards for 220 KV Sub station Manmad, Tal:- Nandgaon, Dist:- Nashik.

The quotations should reach to this office on or before **10/02/2022** up to 15.00 Hrs

- 1) The rates [percentage] should be quoted on Firm Quotation basis (Two Bid System only) including cost of materials, labours & T&P etc. required for execution of the work.

**(a) Compulsory Primary Documents in 1<sup>st</sup> Envelop:(Technical Bid)**

- (i) Valid Certificate of Registration of appropriate class for Civil works from PWD /MES/ Railways/ Jeevan Pradhikaran ETC.OR From Any Govt. / Central Government and registered vendor of MSETCL.
- (ii) GST/ GSTIN Registration Certificate.
- (iii) PAN Card
- (iv) E.P.F. Registration Certificate – issued by competent authority of Govt.
- (v) Experience of having successfully completed similar civil works.
- (vi) Payment of EMD Rs. 5950.00 to be made by bidder off-line in cash only upto 14.00 hrs of **10/02/2022** in the office of EE(C), Dn., Nashik. EMD details Amount and M.R. No. should be super-scribed on the Envelope & having registered vendor of MSETCL.

**(b) Documents in 2<sup>nd</sup> Envelop:(Price Bid)**


- i) Price bid only where in the rates/percentage should be quoted in figures as well as in words.

**NOTE:- Envelop No.2 (Price Bid) will be opened after qualifying in (Technical Bid) Envelop No.1**

- 2) The quantities enumerated in here attached Schedule B are approximate, however the payment will be made against actual executed quantities on site.

- 3) The work should be completed within **15 days** from the date of handing over the site to commence the work, failing of which a penalty at  $\frac{1}{2}\%$  per week subject to the maximum 10% of the ordered value will be imposed.
- 4) The work should be strictly carried out as per standard specifications & up to the entire satisfaction of the Engineer-in-charge.
- 5) No materials will be supplied by the MSETCL for this work except materials as shown in Schedule A
- 6) Payment will be made through First & Final bill/ R.A. bill basis at the discretion of undersigned.
- 7) The contractor will have to pay security deposit to this office equal to 5% of the ordered value.
- 8) In case any accident occurred to the Contractor's labour/workmen during execution of work, the contractor will be fully responsible for all claims & compensation. No charge in any case will be borne by the MSETCL
- 9) The materials to be utilized for the work should be getting approved from the Engineer-in-charge prior to its utilization for the work.
- 10) The terms & conditions enumerated in the approved Booklet "TENDER AND CONTRACTOR FOR WORKS" will be applied in this case & will be binding on the contractor entirely.
- 11) Right to accept any or to reject any or all the quotations without assigning any reason there of is reserved by the undersigned.
- 12) Payment will be released to agency as per availability of funds. Further MSETCL will not pay any compensation due to non availability of funds.

Yours faithfully,

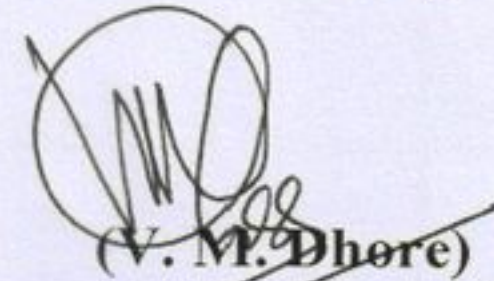

**Executive Engineer (Civil)**  
**EHV Civil CCM Dn. Nashik.**

Copy s.w.r.t.-

- 1) The Superintending Engineer (Civil) EHV CCCM Circle, Nashik.

Copy to-

- 1) Dy. Manager [F&A] Dn. Office, Nashik.
- 2) Master File/Notice Board.

**MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO.LTD**


**EHV CCCM Division, Nashik**

Name of work :-Providing and fixing of office table, side table, office chairs & cupboards for 220 KV Sub station  
Manmad, Tal:- Nandgaon, Dist:- Nashik.

**SCHEDULE 'B'**

Sr. No.	Description of Item	Qty	Unit	Rate	Including GST 18%	Total Rate	Amount
1	Providing & fixing office tables made up from 18mm.Thick plywood as per approved drawing including approved quality lamination on top of table,drawer,key board shall be provided from 12mm.Thick plywood including all material, labour, transportation, lock, handel, telescopic channels, polishing etc.complt.as directed by Engineer in charge.	3.00	nos	23747.00	4274.46	28021.46	84064.38
2	Providing & fixing wooden Side table size 0.90 X 0.75 X 0.45 using 18mm thick plywood to all side Mica fixing & arrangement of fixing key board,polishing inner side & fixing Telescopic channel for keyboard system etc.Complt. As per site in charge	3.00	Nos	15022.00	2703.96	17725.96	53177.88
3	Providing & fixing office wooden office Cupboard having size 1.5 x 0.5x 1.17 made up from 18mm Thick plywood (Commercial )and all side Mica fixing & arrangement of fixing key board,polishing as per approved drawing including approved quality lamination(BOTH SIDE) including all material, ( Nails , screws, white tape, Magnets etc ) labour, transportation, lock, ,polishing etc.complete.as directed by Engineer in charge.(Material to be approved by Executive Enginnering(C),Nashik Division before execution)	6.00	Nos	26261.00	4726.98	30987.98	185927.88
4	Providing & fixing office wooden office Lockers having size 1.13 x 0.53 x 2.13 made up from 18mm Thick plywood (Commercial )and all side Mica fixing & arrangement of fixing key board,polishing as per approved drawing including approved quality lamination(BOTH SIDE) including all material, ( Nails , screws, white tape, Magnets etc ) labour, transportation, lock, ,polishing etc.complete.as directed by Engineer in charge.(Material to be approved by Executive Enginnering(C),Nashik Division before execution)	2.00	Nos	38304.00	6894.72	45198.72	90397.44
5	Providing & fixing office wooden office Cupboard having size 1.13 x 0.53 x 2.13 made up from 18mm Thick plywood (Commercial )and all side Mica fixing & arrangement of fixing key board,polishing as per approved drawing including approved quality lamination(BOTH SIDE) including all material, ( Nails , screws, white tape, Magnets etc ) labour, transportation, lock, ,polishing etc.complete.as directed by Engineer in charge.(Material to be approved by Executive Enginnering(C),Nashik Division before execution)	1.00	Nos	35657.00	6418.26	42075.26	42075.26

Sr. No.	Description of Item	Qty	Unit	Rate	Including GST 18%	Total Rate	Amount
6	<p>Single Bed @ 2000LX 900DX 500H</p> <p>Providing and fixing Single Bed of Size 2000Lx900Dx500H Understructure: - Side Panel: - The side panels are made up of 18mm thick Plywood with both side decorative laminate. All exposed edges are sealed with Lipping patti. The overall width of the side panel is 150mm. The side panels have 18mm thick Plywood Baton running for required length to add rigidity to the structure.</p> <p>Head Board :- The head board is made up of 18mm thick Prelam Particle Board with both side decorative laminate. All exposed edges are sealed with Lipping patti. The head board size to be considered as 900 x 200mm.</p> <p>Bed Base: - The Bed Base is made up of 12mm thick Plywood with both side White laminate</p>	4.00	No.	29032.00	5225.76	34257.76	137031.04
							592673.88
						Say Rs	592674.00

  
 Executive Engineer (Civil)  
 EHV CCCM Dn Nashik.

I / We hereby agree to carryout the above work as under :-

- At estimated cost.
- Above.....% in words.....Of Estimated cost in Schedule "B"
- Below.....% in words.....Of Estimated cost in Schedule "B"

I/ We have read the instructions and the same are binding on me / us.

Signature of the Contractors & Address.