

MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO.LTD.

(CIN No. U40109MH2005SGC153646)

From:- Executive Engineer (Civil)

EHV Civil Construction cum Maintenance Division Nashik

“Administrative Building”, Block No. 6, 1st floor, Racca Plot,

Old Saikheda Road, Jail Road, Nashik Road-422 101.

Ph No.:-0253-2403101 (O), Extension Phone No, 0253-2403110

E-Mail ID : ee5710@mahatransco.in Website: www.mahatransco.in

Ref. No. EEC/EHV/CCCM Dn/NSK/Tech- **No - 3 6 5 -** Date:- **29 MAR 2022**

e- Quotation

Sealed and superscripted e- quotations are invited for the work of “**Various civil maintenance works at 132 KV Ranwad Sub station, Tal:- Niphad, Dist:- Nashik.**” As detailed in schedule “B” is enclosed herewith subject to following terms and conditions.

Name of Work:- Various civil maintenance works at 132 KV Ranwad Sub station,
Tal:- Niphad, Dist:- Nashik.

The quotations should reach to this office on or before **05/04/2022** up to 15.00 Hrs

- 1) The rates [percentage] should be quoted on Firm Quotation basis (Two Bid System only) including cost of materials, labours & T&P etc. required for execution of the work.

(a) Compulsory Primary Documents in 1st Envelop:(Technical Bid)

- (i) Valid Certificate of Registration of appropriate class for Civil works from PWD /MES/ Railways/ Jeevan Pradhikaran ETC.OR From Any Govt. / Central Government and registered vendor of MSETCL.
- (ii) GST/ GSTIN Registration Certificate.
- (iii) PAN Card
- (iv) E.P.F. Registration Certificate – issued by competent authority of Govt.
- (v) Experience of having successfully completed similar civil works.
- (vi) Payment of **EMD Rs. 8280.00** to be made by bidder off-line in cash only upto 14.00 hrs of **05/04/2022** in the office of EE(C), Dn., Nashik. EMD details Amount and M.R. No. should be super-scribed on the Envelope & having registered vendor of MSETCL.

(b) Documents in 2nd Envelop:(Price Bid)


- i) Price bid only where in the rates/percentage should be quoted in figures as well as in words.

NOTE:- Envelop No.2 (Price Bid) will be opened after qualifying in (Technical Bid) Envelop No.1

- 2) The quantities enumerated in here attached Schedule B are approximate, however the payment will be made against actual executed quantities on site.
- 3) The work should be completed within **15 days** from the date of handing over the site to commence the work, failing of which a penalty at ½% per week subject to the maximum 10% of the ordered value will be imposed.

- 4) The work should be strictly carried out as per standard specifications & up to the entire satisfaction of the Engineer-in-charge.
- 5) No materials will be supplied by the MSETCL for this work except materials as shown in Schedule A
- 6) Payment will be made through First & Final bill/ R.A. bill basis at the discretion of undersigned.
- 7) The contractor will have to pay security deposit to this office equal to 5% of the ordered value.
- 8) In case any accident occurred to the Contractor's labour/workmen during execution of work, the contractor will be fully responsible for all claims & compensation. No charge in any case will be borne by the MSETCL
- 9) The materials to be utilized for the work should be getting approved from the Engineer-in-charge prior to its utilization for the work.
- 10) The terms & conditions enumerated in the approved Booklet "TENDER AND CONTRACTOR FOR WORKS" will be applied in this case & will be binding on the contractor entirely.
- 11) Right to accept any or to reject any or all the quotations without assigning any reason there of is reserved by the undersigned.
- 12) Payment will be released to agency as per availability of funds. Further MSETCL will not pay any compensation due to non availability of funds.

Yours faithfully,

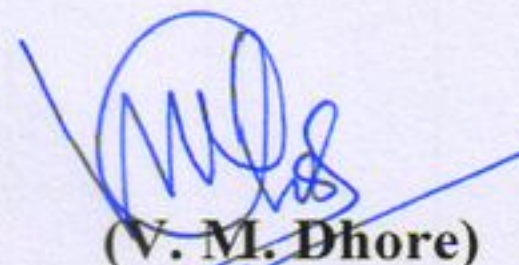

(V. M. Dhore)
Executive Engineer (Civil)
EHV Civil CCM Dn. Nashik.

Copy s.w.r.t.-

- 1) The Superintending Engineer (Civil) EHV CCCM Circle, Nashik.

Copy to-

- 1) Additional Executive Engineer [Civil] EHV CCCM Sub Division Nashik-II
- 2) Dy. Manager [F&A] Dn. Office, Nashik.
- 3) Master File/Notice Board.

MAHARASTRA STATE ELECTRICITY TRANSMISSION CO. LTD
EHV CIVIL CONSTRUCTION DIVISION, NASHIK

Name of work:-Various civil maintenance works at 132 KV Ranwad Sub station, Tal:- Niphad, Dist:- Nashik.

SCHEDULE 'B'

No.	Description of Item	Quantity	Unit	Rate	GST 18 %	Total	Amount
1	Excavation for foundation in earth, soil of all types, sand, gravel and soft murum, including removing the excavated material up to a distance of 50 m. beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering including shoring and strutting etc. complete. (Lift upto 1.5 m.) By Mechanical Means	1.000	Cum.	204.68	36.84	241.52	241.52
2	Excavation for foundation in hard murum including removing the excavated material upto distance of 50 metres beyond the building area and stacking and spreading as directed, dewatering, preparing the bed for the foundation and necessary back filling, ramming, watering including shoring and strutting etc. complete. (Lift upto 1.50 m) By Mechanical Means	1.000	Cum.	224.83	40.47	265.30	265.30
3	Labour charges for removing grass, thorny shrubs, Jungli shrub, Kubabul and alike grass along roadside making the ground clean by showel and phavaras etc. complete.	10.000	Sqm.	7.42	1.34	8.76	87.60
4	Providing and fabricating structural steel work in rolled sections, fixed with connecting plates or angle cleats in main and cross beams, hip and jack rafters, purlins connecting to truss members and the like, as per detailed designs and drawing or as directed including cutting, fabricating, hoisting, erecting, fixing in position, making riveted/ bolted/ welded connections and one coat of anticorrosive paint and over it two coats of oil painting of approved quality and shade etc. complete.	0.050	MT.	90,762.89	16,337.32	107,100.21	5,355.01
5	Providing and laying Cast in situ/Ready Mix cement concrete in M-10 of trap/ granite/ quartzite/ gneiss metal for foundation and bedding including bailing out water, Steel centering, formwork, laying/pumping, compacting, roughening them if special finish is to be provided, finishing if required and curing complete, etc. complete. With fine aggregate (Crushed sand VSI Grade)	0.100	Cum.	6,391.01	1,150.38	7,541.39	754.14
6	Providing and laying in situ /Ready Mix cement concrete M-20 of trap / granite /quartzite/ gneiss metal for R.C.C. work in foundations like raft, strip foundations, grillage and footings of R.C.C. columns and steel stanchions etc. including bailing out water, Steel centering formwork, laying/pumping cover blocks, compaction and curing roughening the surface if special finish is to be provided (Excluding reinforcement and structural steel) etc. complete, With fine aggregate (Crushed sand VSI Grade)	0.100	Cum.	7,568.06	1,362.25	8,930.31	893.03
7	Providing and laying Cast in situ/Ready Mix cement concrete M-20 of trap / granite /quartzite/ gneiss metal for R.C.C. columns as per detailed designs and drawing or as directed including steel centering, formwork, cover blocks, laying/pumping, compaction finishing the formed surfaces with cement mortar 1:3 of sufficient minimum thickness to give a smooth and even surface or roughening if special finish is to be provided and curing etc. complete.(Excluding reinforcement and structural steel). With fine aggregate (Crushed sand VSI Grade)	0.100	Cum.	14,271.48	2,568.87	16,840.35	1,684.04

No.	Description of Item	Quantity	Unit	Rate	GST 18 %	Total	Amount
8	Providing and laying Cast in situ/Ready Mix cement concrete M-20 of trap / granite /quartzite/ gneiss metal for R.C.C. beams and lintels as per detailed designs and drawings or as directed including steel centering, formwork, cover blocks, laying/pumping, compaction and roughening the surface if special finish is to be provided and curing etc. complete. (Excluding reinforcement and structural steel). with Drum Type mixer/ concrete Batch mix plant (Pan mixer) etc. complete. With fine aggregate (Crushed sand VSI Grade)	0.100	Cum.	12,676.49	2,281.77	14,958.26	1,495.83
9	Providing and laying Cast in situ/Ready Mix cement concrete in M-20 of trap/ granite/ quartzite/ gneiss metal for R.C.C. pardi of required thickness including steel centering, formwork, cover blocks, laying/pumping, compacting , curing , finishing and roughening them if special finish is to be provided and curing complete.(Excluding reinforcement and structural steel) With fine aggregate (Crushed sand VSI Grade)	0.100	Cum.	16,079.63	2,894.33	18,973.96	1,897.40
10	Providing and fixing in position TMT - FE - 500 bar reinforcement of various diameters for R.C.C. pile caps, footings, foundations, slabs, beams columns, canopies, staircase, newels, chajjas, lintels pardis, copings, fins, arches etc. as per detailed designs, drawings and schedules. including cutting, bending, hooking the bars, binding with wires or tack welding and supporting as required complete.	0.050	MT.	76,120.57	13,701.70	89,822.27	4,491.11
11	Providing second class Burnt Brick masonry with conventional/ I.S. type bricks in cement mortar 1:6 in foundations and plinth of inner walls/ in plinth external walls including bailing out water manually , striking joints on unexposed faces, raking out joints on exposed faces and watering etc. Complete.	0.100	Cum.	8,402.67	1,512.48	9,915.15	991.52
12	Providing second class Burnt Brick masonry with conventional/ I.S. type bricks in cement mortar 1:6 in superstructure including striking joints, raking out joints, watering and scaffolding etc. Complete	0.100	Cum.	8,643.41	1,555.81	10,199.22	1,019.92
13	Providing internal cement plaster 6 mm thick in a single coat in cement mortar 1:4 without neeru finish to concrete surface in all positions including scaffolding and curing etc. Complete.	5.000	Sqm.	207.89	37.42	245.31	1,226.55
14	Providing cement based water proofing treatment to terraces (Indian water proofing or alike) with brick bats laid in required slope to drain the water for any span after cleaning the base surface. Applying a coat of cement slurry admixed with approved water proofing compound and laying the brick bats on bottom layer in C.M.1:5 admixed with approved water proofing compound filling up to half depth of brick bats, curing this layer for 3 days, applying cement slurry over this layer joints of brick bats with C.M.1:3 admixed with approved water proofing compound and finally top finishing with average 20 mm. thick layers of same mortar added with jute fiber at 1Kilogramper bag including finishing the surface smooth with cement slurry admixed with approved water proofing compound. Marking finished surface with false squares of 300mm x 300 mm. making the junctions at the parapet rounded and tapered top for required height, with drip mould at the junction of plaster and parapet and curing and covering 10 years Guarantee against leakproofness on Court fee stamp paper of Rs. 500/- including ponding test etc. complete.	1.000	Sqm.	1,145.34	206.16	1,351.50	1,351.50


No.	Description of Item	Quantity	Unit	Rate	GST 18 %	Total	Amount
15	Providing internal cement plaster 12mm thick in single coat in cement mortar 1:3 without neeru finish to concrete or brick surfaces, in all position including scaffolding and curing etc. complete.	20.000	Sqm.	300.58	54.10	354.68	7,093.60
16	Providing internal cement plaster 20mm thick in Single coats in cement mortar 1:4 without neeru finish, to concrete, brick surface, in all positions including scaffolding and curing etc. complete.	5.000	Sqm.	404.80	72.86	477.66	2,388.30
17	Providing neeru finish to plastered surfaces in all positions including scaffolding and curing etc. complete.	10.000	Sqm.	64.69	11.64	76.33	763.30
18	Removing the existing cement plaster of any thickness without causing dust nuisance and stacking the debris upto a distance of 50 metres or spreading in the compound and cleaning the site etc. complete.	10.000	Sqm.	51.96	9.35	61.31	613.10
19	Providing and laying cement concrete flooring 40 mm thick with M15 cement concrete laid to proper level and slope in alternate bays including compaction, filling joints, marking lines to give the appearance of tiles of 30 cm x 30 cm or other size laid diagonally/ square etc finishing smooth (with extra cement) in any colour as directed and curing etc. complete. With Crushed Sand.	1.000	Sqm.	512.80	92.30	605.10	605.10
20	Providing and laying vitrified mirror / glossy finish tiles decorative type having size 590 mm to 605 mm x 590 mm to 605 mm of 8 to 10 mm thickness and confirming to IS. 15622-2006 (group Bla) of approved make, shade and pattern for flooring in required position laid on a bed of 1:4 cement mortar including neat cement float, filling joints, curing and clearing etc. complete.	1.000	Sqm.	1,235.97	222.47	1,458.44	1,458.44
21	Providing and laying vitrified mirror / glossy finish tiles having size 590 mm to 605 mm x 590 mm to 605 mm of 8 to 10 mm thickness and confirming to IS. 15622-2006 (group Bla) of approved make, shade and pattern for dado and skirting in required position fixed in 1:4 cement mortar including neat cement float, filling joints, curing and clearing etc. complete	5.000	Sqm.	1,312.32	236.22	1,548.54	7,742.70
22	Providing and laying Antiskid Ceramic tiles of approved quality of size 30 cm x 30 cm and confirming to IS 15622-2006 (Group-B IIA) for antiskid flooring in required position laid on a bed of 1:4 cement mortar including cement float, filling joint with cement slurry cleaning curing etc. complete.	7.000	Sqm.	1,254.40	225.79	1,480.19	10,361.33
23	Providing and applying two coats of water proof cement paint of approved manufacture and of approved colour to the plastered surfaces including scaffolding if necessary, cleaning and preparing the surface, watering for two days etc. complete.	5.000	Sqm.	78.48	14.13	92.61	463.05
24	Removing old paint from steel and other metal surfaces and making the surfaces even with hand scrapping, scaffolding etc. complete.	5.000	Sqm.	16.97	3.05	20.02	100.10
25	Providing and applying two coats of textured synthetic paint of approved shade and quality and one coat of primer before applying textured paint including scaffolding if necessary preparing surface by thoroughly cleaning oil, grease, dirt and other materials as required, etc. complete.	400.000	Sqm.	156.95	28.25	185.20	74,080.00
26	Providing and applying washable oil-bound distemper of approved colour and shade to old and new surfaces in two coats including scaffolding, preparing the surfaces. (excluding the primer coat.) etc. complete.	100.000	Sqm.	45.60	8.21	53.81	5,381.00
27	Providing and applying plastic emulsion paint of approved quality, colour and shade to old and new surfaces in two coats including scaffolding, preparing the surface. (excluding the primer coat)etc. complete.	600.000	Sqm.	74.24	13.36	87.60	52,560.00

No.	Description of Item	Quantity	Unit	Rate	GST 18 %	Total	Amount
28	Scrapping the old plastered internal surface with sand paper and coating the entire surface with mixture of whiting or glue and linseed oil including scaffolding etc. complete as directed.	600.000	Sqm.	36.06	6.49	42.55	25,530.00
29	Providing and fixing solid core flush door shutter in single leaf 32 mm thick decorative type of exterior grade as per detailed drawings approved face veneers 3 mm thick on both faces or as directed, all necessary beads, mouldings and lipping, wrought iron hold fasts, chromium plated fixtures and fastenings, with brass mortise lock, chromium plated handles on both sides, and finishing with French Polish etc. complete.	1.000	Sqm.	2,994.85	539.07	3,533.92	3,533.92
30	Providing and fixing in position (as per 1868 / 1982) Aluminium sliding window of three tracks with rectangular pipe 95 x 38.10 x 0.90 mm at weight 0.637 Kilogram/ Running metre. with window frame bottom track section 92 x 31.75 x 1.30 mm at weight 1.070 Kilogram/ Running metre.. Top and side track section 92 x 31.75 x 1.30 mm at weight 0.933 Kilogram/Running metre. The shutter should be of bearing bottom 40 x 18 x 1.25 mm at weight 0.417 Kilogram/Running metre. Inter locking section 40 x 18 x 1.10 mm at weight 0.469 Kilogram/Running metre. and handle and top section 40 x 18 x 1.25 mm at weight 0.417 Kilogram/ Running metre. As per detailed drawings and as directed by Engineer in charge with all necessary Aluminium sections fixtures and fastenings such as roller bearing in nylon casting and self locking catch fitted in vertical section of shutter including 5 mm thick plain glass and aluminium mosquito net shutter with stainless steel jail with all required screws and nuts etc, complete. With colour Anodising without box	1.000	Sqm.	5,802.00	1,044.36	6,846.36	6,846.36
31	Providing and fixing 15 mm dia. screw down bib/ stop tap of brass including necessary socket union nut complete.	10.000	Number	675.54	121.60	797.14	7,971.40
32	Providing and fixing 1st class white glazed earthenware Orissa Type W.C. Pan 580 mm dia including P or S trap cast iron soil and vent pipe upto the outside face of the wall (1:5:1 0) cement concrete bedding 15 mm thick, 10 liter P.V.C. flushing cistern with all necessary pipe connection etc. complete.	1.000	Number	7,275.03	1,309.51	8,584.54	8,584.54
33	Providing and laying in trenches 15 mm dai. CPVC pipe including necessary excavation, fittings. Refilling trenches etc. complete Including removing existing pipe line if necessary and conveying and stacking the same in PWD chowky or as directed etc. complete.	20.000	Rmt.	268.31	48.30	316.61	6,332.20
34	Providing and laying in trenches 20 mm dai. CPVC pipe including necessary excavation, fittings. Refilling trenches etc. complete. Including removing existing pipe line if necessary and conveying and stacking the same in PWD chowky or as directed etc. complete.	20.000	Rmt.	303.30	54.59	357.89	7,157.80
35	Providing and laying in trenches 25 mm dai. CPVC pipe including necessary excavation, fittings. Refilling trenches etc. complete. Including removing existing pipe line if necessary and conveying and stacking the same in PWD chowky or as directed etc. complete.	5.000	Rmt.	404.05	72.73	476.78	2,383.90
36	Providing and laying in trenches 40mm dai. CPVC pipe including necessary excavation, fittings. Refilling trenches etc. complete. Including removing existing pipe line if necessary and conveying and stacking the same in PWD chowky or as directed etc. complete.	5.000	Rmt.	569.49	102.51	672.00	3,360.00
37	Removing doors and windows with frames and stacking the materials as directed with all leads, lifts etc. complete.	1.000	Number	155.89	28.06	183.95	183.95
38	Providing and fixing C.P. pillar cock long neck with aerator of approed make including necessary sockets/union nut etc. complete.	2.000	Number	1,418.95	255.41	1,674.36	3,348.72

No.	Description of Item	Quantity	Unit	Rate	GST 18 %	Total	Amount
39	Dismantling brick masonry in lime or cement mortar and stacking the materials as directed with all leads, lifts etc.	5.000	Cum.	334.06	60.13	394.19	1,970.95
40	Dismantling the R.C.C. Work 1:2:4 and sorting out the materials such as steel etc. as directed and stacking them within the specified lead as directed etc. complete.	5.000	Cum.	1,448.64	260.76	1,709.40	8,547.00
41	Providing service of Carpenter skilled on daily basis as per requirement of Engineer Incharge and carrying out the work etc complete	1.000	No.	679.78	122.36	802.14	802.14
42	Providing service of Plumber skilled on daily basis with tools and as per requirement of Engineer Incharge and carrying out the work etc complete	1.000	No.	679.78	122.36	802.14	802.14
43	Providing service of Mazdoor unskilled (heavy male) on daily basis and as per requirement of Engineer Incharge and carrying out the work etc complete	5.000	No.	614.03	110.53	724.56	3,622.80
44	Providing and fixing screw down for 20 mm dia. wheeled stop tap of brass including necessary sockets/union nut complete.	2.000	Number	641.60	115.49	757.09	1,514.18
45	Providing and fixing screw down for 25 mm dia. wheeled stop tap of brass including necessary sockets/union nut complete.	2.000	Number	832.49	149.85	982.34	1,964.68
46	Removing the tar or coba and disposing of the material as directed etc. complete.	330.000	Sq. m	26.51	4.77	31.28	10,322.40
47	Providing & laying APP modified water proofing memberane with non woven ployster reinforcement 3mm thick water proofing treatment (Dr. fixit Torch shield or super theomolay of STP make) approved by Engineer Incharge, to the roof including cleaning the roof surface with wire/ coir brush & with air blower repairing pot holes cracks if any over Siporex/ RCC slab by using polymer base mortar by adding SBR latex @ 5 ltr/bag in cm 1:4 applying a coat of oil base bitumen primer Dr. fixit/Shalitex @200 gms/M2 by brush or with roller after removing of dust completely including providing & laying 3 mm thick App shit (Pidilite/STP make) as per the manufacturers instruction by heating with torch at a specified temprature including providing 100 mm overlap in all sides as directed by Engineer In charge etc. complete & applying two coats of silver shield @ 0.1 kg/Sqm etc. complete as directed by Engineer In charge	330.000	Sq. m	609.79	109.76	719.55	237,451.50
48	Providing and laying telephone black / Amba White / Cadburybrown / Ruby red / Ocean Brown granite stone of 18 to 20 mm thick for door frame/ dado/ window boxing etc. On C.M. 1:6 including filling joints with polymer base filler nosing/moulding the sharp edges wherever necessary, curing, etc. complete.	5.500	Sq. m	4,617.42	831.14	5,448.56	29,967.08

No.	Description of Item	Quantity	Unit	Rate	GST 18 %	Total	Amount
49	Providing and Fixing the french Door with Door Frame Made from 1.2mm galvanized sheet (120 GSM Zero spangle make Jindal or Pasco) frame section size 85 mm x 55 mm. bottom section will be concealed and fixings with 100 mm nails & close with PVC cap, Frame welding from MIG type and door shutter of Single/Two/Three/Four Leaf Door with fix net single glass window made from 1.00 mm Galvanized sheet (120 GSM Zero spangle make Jindal or Pasco) Door section size 72 mm x 42 mm welding MIG type., Door is Interlock Type, with 20 mm Pin Type Hinges, Door shutter Bottom side 50% Close with Plain shutterpatti (0.8 mm Galvanized sheet), with middle member section size 160 mm x 42 mm, with upper size 3.50 MM plain glass with MS 10 mm bright bar Glass Locking with Aluminium Closing Section press fit arrangement, Inside 16 mm SS Aldrop with 250 mm long aldrop fitting with Aluminium rivet. Out side welding Aldrop 16 mm rod with 250 mm long fitting with welding. 150 mm Handle 4 nos, Inside 2 nos of concealed SS tower bolt. Powder coating details: Pure polyester structure finish 90 to 100 micron powder coat, make asian Door make as directed by Engineer in Charge..etc.	10.000	Sq. m	6,162.71	1,109.29	7,272.00	72,720.00
50	Providing and laying concrete pipes of I.S.NP. class of 150mm diameter in proper line, level and slope including necessary collars, excavation, laying, fixing with collars in cement mortar 1:1 and refilling the trench complete.	30.000	Rmt.	546.16	98.31	644.47	19,334.10
51	Providing and constructing Brick Masonry Inspection Chamber 60cm x 45cm x 90cm including 1:4:8 cement concrete foundation 1:2:4 cement concrete channels half round G.S.W. pipes, Brick Masonry, plastering from inside and with frame fixed in cement concrete with R.C.C. Cover medium duty 140Kilogramwith frame etc complete.	4.000	No.	8,290.99	1,492.38	9,783.37	39,133.48
52	Providing and fixing hume pipe septic tank 900mm diameter with vent pipe and cap including necessary (including excavation and laying)	2.000	No.	16,639.25	2,995.07	19,634.32	39,268.64
53	Providing soak pit of size 120cm x 120cm x 120cm including excavating and filling with brick-bats.	2.000	No.	2,845.32	512.16	3,357.48	6,714.96
54	Providing and applying two coats of synthetic enamel paint of approved colour to new /old structural steel work and wood work in buildings, including scaffolding if necessary, cleaning and preparing the surface (excluding primer coat) etc. complete.	20.000	Sqm.	94.38	16.99	111.37	2,227.40
55	Supplying & erecting LED 20W tube light fitting (4 feet) with aluminium housing, heat sink, integrated HF electronic driver complete.	12.000	No.	926.00	166.68	1,092.68	13,112.16
56	Supplying and erecting five star rated energy saving Ceiling fan 230 V A.C. 50 cycles 1200 mm complete erected in position as per specification no. FG-FN/CF	7.000	No.	2,042.00	367.56	2,409.56	16,866.92
57	Supplying and erecting Square / rectangular shaped CRCA / die cast aluminium powder coated housing LED LED panel lights (slim edged lit) 600 X 600 mm suitable for 36-40 W with provision for plane front frame with translucent cover fixed to the housing.	5.000	No.	3,741.00	673.38	4,414.38	22,071.90
58	Supplying and erecting unbreakable concealed type modular switch box with double mounting plate for 4 module duly erected flush to wall with required chiselling and finishing with cement mortar / POP as per required to match the background	1.000	No.	251.00	45.18	296.18	296.18
59	Supplying and erecting unbreakable concealed type modular switch box with double mounting plate for 8 module duly erected flush to wall with required chiselling and finishing with cement mortar / POP as per required to match the background	3.000	No.	375.00	67.50	442.50	1,327.50

No.	Description of Item	Quantity	Unit	Rate	GST 18 %	Total	Amount
60	Supplying and erecting unbreakable concealed type modular switch box with double mounting plate for 12 module duly erected flush to wall with required chiselling and finishing with cement mortar / POP as per required to match the background.	5.000	No.	476.00	85.68	561.68	2,808.40
61	Supplying and erecting unbreakable concealed type modular switch box with double mounting plate for 16 / 18 module duly erected flush to wall with required chiselling and finishing with cement mortar / POP as per required to match the background	4.000	No.	537.00	96.66	633.66	2,534.64
62	Supplying and erecting ISI mark modular type switch 16 / 20 A with indicator, duly erected on provided plate and box with wiring connections complete.	12.000	No.	134.00	24.12	158.12	1,897.44
63	Supplying and erecting ISI mark modular type 3 pin 6 / 16A multi socket with safety shutter, duly erected on provided plate and box with wiring connections complete.	12.000	No.	166.00	29.88	195.88	2,350.56
64	Supplying and erecting ISI mark modular type switch 6A / 10A duly erected on provided plate and box with wiring connections complete.	85.000	No.	70.00	12.60	82.60	7,021.00
65	Supplying and erecting ISI mark modular type 3 pin 6A multi sockets with safety shutter, duly erected on provided plate and box with wiring connections complete.	18.000	No.	113.00	20.34	133.34	2,400.12
66	Supplying and erecting ISI mark modular type 3 pin 6A multi sockets with safety shutter, duly erected on provided plate and box with wiring connections complete.	5.000	No.	1,457.13	262.28	1,719.41	8,597.05
67	Providing and laying 100 mm dia salt glazed stoneware pipe including fittings such as bends, tees, single junction, double junctions laying, jointing (including excavation and refilling the trenches) complete.	10.000	No.	342.54	61.66	404.20	4,042.00
68	Providing and laying for 150 mm dia salt glazed stoneware pipe including fittings Such as bends, tees, single junction, double junctions laying, jointing (including excavation and refilling the trenches) complete.	10.000	No.	417.84	75.21	493.05	4,930.50
						Total Rs.	827,217.10
						Say Rs.	827,217.00

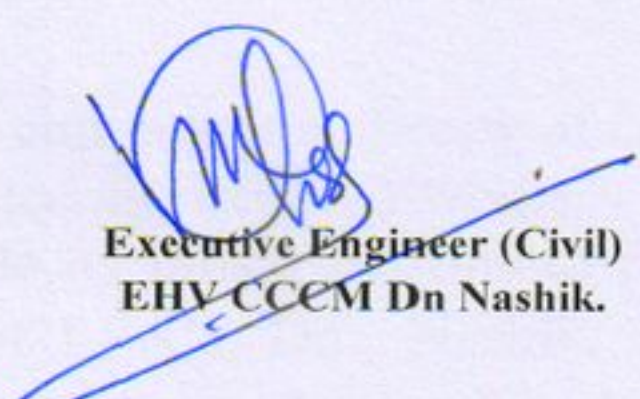
Executive Engineer (Civil)
EHV CCEM Dn Nashik.

I / We hereby agree to carryout the above work as under :-

- At estimated cost.
- Above.....% in words.....Of Estimated cost in Schedule "B"
- Below.....% in words.....Of Estimated cost in Schedule "B"

I/ We have read the instructions and the same are binding on me / us.

Signature of the Contractors & Address.