

MAHARASHTRA STATE ELECTRICITY TRANSMISSION CO.LTD.

(CIN No. U40109MH2005SGC153646)

From:- Executive Engineer (Civil)
EHV Civil Construction cum Maintenances Division Nashik
"Administrative Building", Block No. 6, 1st floor, Racca Plot,
Old Saikheda Road, Jail Road, Nashik Road-422 101.
Ph No.:-0253-2403101 (O), Extension Phone No, 0253-2403110
E-Mail ID :ee5710@mahatransco.in Website: www.mahatransco.in

Ref. No. EEC/EHV/CCCM Dn/NSK/Tech- ~~No~~ - 4 1 4 - Date: ~~11~~ 1 APR 2022

e- Quotation

Sealed and superscripted e- quotations are invited for the work of "Providing weatherproof shed and various miscellaneous work for control room at 220 KV Pimpalgaon Sub station, Dist:- Nashik." As detailed in schedule "B" is enclosed herewith subject to following terms and conditions.

Name of Work:- Providing weatherproof shed and various miscellaneous work for control room at 220 KV Pimpalgaon Sub station, Dist:- Nashik.

The quotations should reach to this office on or before **18/04/2022** up to 15.00 Hrs

- 1) The rates [percentage] should be quoted on Firm Quotation basis (Two Bid System only) including cost of materials, labours & T&P etc. required for execution of the work.

(a) Compulsory Primary Documents in 1st Envelop:(Technical Bid)

- (i) Valid Certificate of Registration of appropriate class for Civil works from PWD /MES/ Railways/ Jeevan Pradhikaran ETC.OR From Any Govt. / Central Government and registered vendor of MSETCL.
- (ii) GST/ GSTIN^eRegistration Certificate.
- (iii) PAN Card
- (iv) E.P.F. Registration Certificate – issued by competent authority of Govt.
- (v) Experience of having successfully completed similar civil works.
- (vi) Payment of EMD Rs. 9990.00 to be made by bidder upto 14.00 hrs of **18/04/2022** in the office of EE(C), Dn., Nashik. EMD details Amount and M.R. No. should be super-scribed on the Envelope & having registered vendor of MSETCL.

(b) Documents in 2nd Envelop:(Price Bid)


- i) Price bid only where in the rates/percentage should be quoted in figures as well as in words.

NOTE:- Envelop No.2 (Price Bid) will be opened after qualifying in (Technical Bid) Envelop No.1

- 2) The quantities enumerated in here attached Schedule B are approximate, however the payment will be made against actual executed quantities on site.

- 3) The work should be completed within **15 days** from the date of handing over the site to commence the work, failing of which a penalty at $\frac{1}{2}\%$ per week subject to the maximum 10% of the ordered value will be imposed.
- 4) The work should be strictly carried out as per standard specifications & up to the entire satisfaction of the Engineer-in-charge.
- 5) No materials will be supplied by the MSETCL for this work except materials as shown in Schedule A
- 6) Payment will be made through First & Final bill/ R.A. bill basis at the discretion of undersigned.
- 7) The contractor will have to pay security deposit to this office equal to 5% of the ordered value.
- 8) In case any accident occurred to the Contractor's labour/workmen during execution of work, the contractor will be fully responsible for all claims & compensation. No charge in any case will be borne by the MSETCL
- 9) The materials to be utilized for the work should be getting approved from the Engineer-in-charge prior to its utilization for the work.
- 10) The terms & conditions enumerated in the approved Booklet "TENDER AND CONTRACTOR FOR WORKS" will be applied in this case & will be binding on the contractor entirely.
- 11) Right to accept any or to reject any or all the quotations without assigning any reason there of is reserved by the undersigned.
- 12) Payment will be released to agency as per availability of funds. Further MSETCL will not pay any compensation due to non availability of funds.

Yours faithfully,

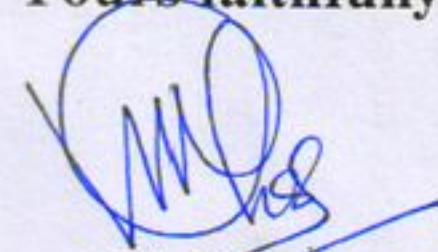

(V. M. Dhore)
Executive Engineer (Civil)
EHV Civil CCM Dn. Nashik.

Copy s.w.r.t.-

- 1) The Superintending Engineer (Civil) EHV CCCM Circle, Nashik.

Copy to-

- 1) Additional Executive Engineer [Civil] EHV CCCM Sub Division Nashik-II.
- 2) Dy. Manager [F&A] Dn. Office, Nashik.
- 3) Master File/Notice Board.


MAHARASTRA STATE ELECTRICITY TRANSMISSION CO. LTD
EHV CIVIL CONSTRUCTION DIVISION, NASHIK

Name of work:-Providing weatherproof shed and various miscellaneous work for control room at 220 KV Pimpalgaon Sub station, Dist:- Nashik

SCHEDULE 'B'

Sr No.	Description	Qty	Unit	Rate without	GST 18%	Rate with GST	Amount
1	Dismantling flat wooden or A.C. Sheet ceiling with frame work including stacking the materials as directed with all leads, lifts etc. complete.	55.000	Square Metre	56.56	10.18	66.74	3,670.70
2	Providing, fabricating and erecting at site of work the tubular steel structure (shed) as per standard design and specifications having various spans in between trusses and in multiples of standard length of bays as specified as per standard specifications, inclusive of cost of steel tubular trusses, tubular columns purlins, tie runners, foundation bolts, base plates, nuts and bolts, welding wherever required etc. as per detailed drawing inclusive of one coat of anticorrosive paint and two coats of oil painting of approved quality and shade etc. complete. Spec. Number : As directed by Engineer-in-charge.	2.500	Metric Tonne	101,579.74	18,284.35	119,864.09	299,660.23
3	Providing and fixing of colour coated Zinc aluminium (R) AZ150 (min 150 gms/sq.mt. total on each side) profiled sheets for roofing. The feed material is manufactured out of nominal 0.45 mm Base Metal Thickness (BMT) (0.5 mm TCT), Hi-strength steel with min.550 MPa yield strength, metallic hot dip coated with Aluminium-Zinc alloy (55% aluminium 43.4% zinc 1.6% silicon) with COLORBOND (R) steel quality super durable polyester paint coat (with inorganic pigment). The paint shall have a total coating thickness of nominal 35 um, comprising of nominal 25um exterior coat on top surface and nominal 10 um reverse coat on back surface. Profile sheet shall have nom. 950- 1050 mm effective cover width and nominal 25-30 mm deep ribs with subtle square fluting in the five pan at nominal 180-250 mm center-to- center. The end rib shall be designed for anti-capacity groove. and return leg. The feed material should have coil manufacturers product details marked a regular interval. including fasteners with min. fastened with min. 25 um Zinc-Tin alloy coated, Hex head, self-drilling screw etc. complete. (weight of profile 4.52 kg/sqm) 900 mm girth (Surface Width).	447.000	Square Metre	1,105.95	199.07	1,305.02	583,343.94
4	Providing and fixing of colour coated Zincaluminium(R) AZ150 (min 150 gms/sq.mt. total on each side) profiled sheets for roofing. The feed material is manufactured out of nominal 0.45 mm Base Metal Thickness (BMT) (0.5 mm TCT), Hi-strength steel with min.550 MPa yield strength, metallic hot dip coated withAluminium-Zinc alloy (55% aluminium 43.4% zinc 1.6% silicon) with COLORBOND (R) steel quality super durable polyester paint coat (with inorganic pigment). The paint shall have a total coating thickness of nominal 35 mm, comprising of nominal 25mm exterior coat on top surface and nominal 10 um reverse coat on back surface. Profile sheet shall have nom. 950-1050 mm effective cover width and nominal 25-30 mm deep ribs with subtle square fluting in the five pan at nominal 180-250 mmcenter- to-center. The end rib shall be designed for anti-capacity groove. and return leg. The feed material should have coil manufacturers product details marked a regular interval. including fasteners with min. fastened with min. 25 um Zinc-Tin alloy coated, Hex head, self-drilling screw etc. complete. (weight of profile 4.52 Kilogram/Square Metre) 600 mm girth (Surface Width).	39.000	Running Meter	709.02	127.62	836.64	32,628.96

Sr No.	Description	Qty	Unit	Rate without	GST 18%	Rate with GST	Amount
5	Providing and laying in situ cement concrete of 1:4:8 proportion with trap/ granite/ quartzite/ gneiss metal in foundation including necessary form work, compacting and curing etc. complete. (with reversible drum type mixer with SCADA with fine aggregates of required specifications (VSI sand finely washed etc)	0.500	Cubic Metre	6,502.78	1,170.50	7,673.28	3,836.64
6	Providing and laying in situ /Ready Mix cement concrete M-20 of trap / granite /quartzite/ gneiss metal for R.C.C. work in foundations like raft, strip foundations, grillage and footings of R.C.C. columns and steel stanchions etc. including bailing out water, Steel centering formwork, laying/pumping cover blocks, compaction and curing roughening the surface if special finish is to be provided (Excluding reinforcement and structural steel) etc. complete With fine aggregate (Crushed sand VSI Grade)	2.460	Cubic Metre	7,025.01	1,264.50	8,289.51	20,392.19
7	Providing Mirror polishing to Kota Stone including using all necessary stones and equipments cleaning, washing etc. complete. For Flooring	300.000	Square Metre	130.29	23.45	153.74	46,122.00
Total Rs.							989,654.66
Say Rs.							989,655.00

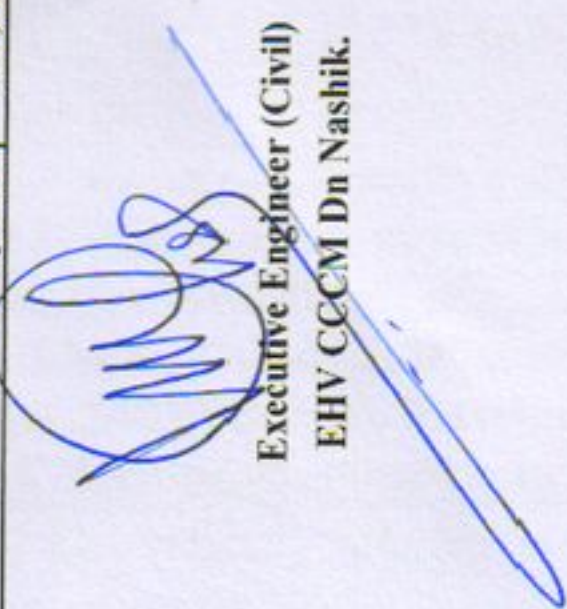
 Executive Engineer (Civil)
 EHV CCM Dn Nashik.

I / We hereby agree to carryout the above work as under :-

- At estimated cost.
- Above.....% in words.....Of Estimated cost in Schedule "B"
- Below.....% in words.....Of Estimated cost in Schedule "B"

I/ We have read the instructions and the same are binding on me / us.

Signature of the Contractors & Address.